

## TMV3 thermostatic mixer tap



### Product details

<b>Warranty:</b>	5 years
<b>Max rated load:</b>	n/a
<b>Doc M compliant:</b>	Yes
<b>Suitable for wet areas:</b>	Yes
<b>Max Inlet Temp:</b>	85°C
<b>Factory Set Temp:</b>	43°C
<b>Max Operating Pressure:</b>	10 BAR Static
<b>Min Inlet Pressure:</b>	0.2 BAR Dynamic

### Features

- TMV3 & WRAS approved
- Safe touch body
- Copper inlet tails
- Self-draining spout
- Complies with Part M of the Building Regulations
- Easy operation for users with limited dexterity

### Finish options



Polished  
chrome

### Product description

TMV3 thermostatic mixer tap, polished chrome



### Product code

TAPTMV/CP

### Disclaimer

NYMAS Group makes every effort to ensure that the information provided on this data sheet is correct. However, we cannot guarantee this, and accept no liability for any information or advice given on this data sheet.

## Dimensions (mm)

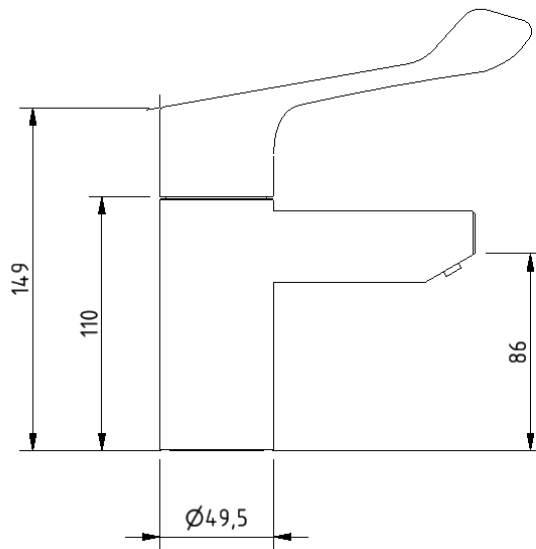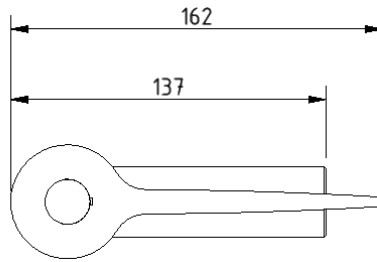

FLOW RATE FOR TAPT MV

